93011

TTAF

2 types of high purity silver plated copper & OFC conductors | Teflon tape isolation
Pearl Brown PVC jacket
Capacity Per 1M : 27.69pF
Resistance Per 1KM : 2.6ohm

SPEAKER - SILVER LINE SERIES

- It is designed for easy installation. The conductor combines two types of silver plated copper with an aggregate gauge of 8 AWG (8.7 mm²)x2C. An extra Teflon® wrapping insures complete isolation from external interferences and the wide pitch design is to reduce capacitance.
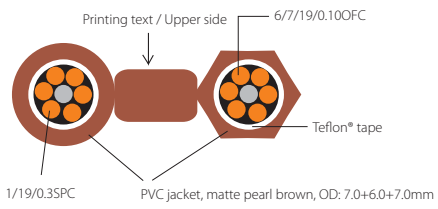
Structure